


 **GOULDS PUMPS**

Goulds 3393

High Pressure, Multistage Ring Section Pump

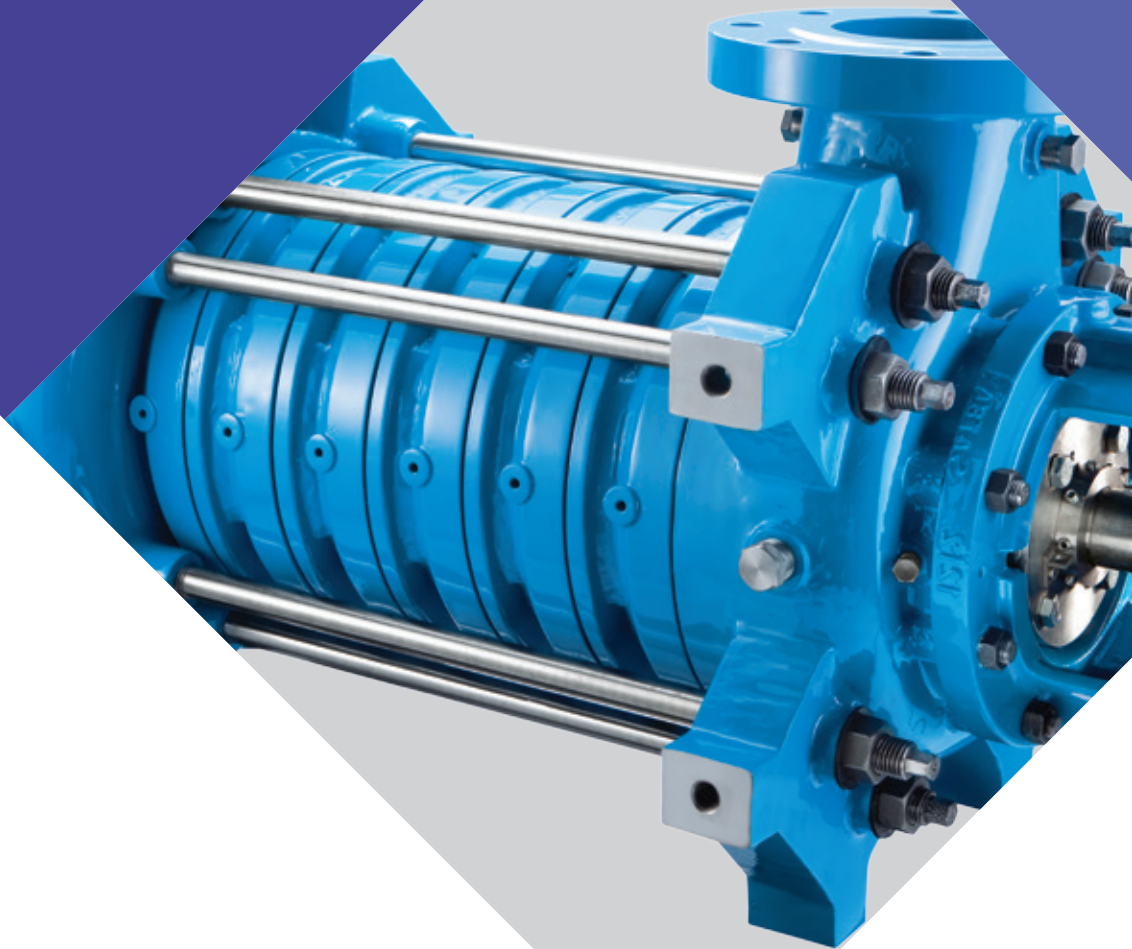

ITT

ENGINEERED FOR LIFE



Goulds 3933

Lower Total Cost of Ownership (TCO) for demanding, high-pressure applications

Everything about the new ITT Goulds 3393 multistage ring section pump is designed to minimize your Total Cost of Ownership. Simply put, it's more efficient, more reliable, and less expensive to maintain than conventional high-pressure pumps. Here's why:

Lower Energy Costs

The 3393 conserves energy by delivering maximum pump efficiency. The integrated diffuser and interstage casing are cast as a single component rather than as two separate pieces. This results in smoother flow transition, which significantly reduces hydraulic losses.

Performance testing on the 3393 has shown a two- to three-point improvement over traditional designs. This added efficiency can mean big energy savings because the same job can be done using less horsepower. For example, a 3393 in continuous operation that consumes 20 less horsepower (15 kW) will save \$65,000 over a five-year period if energy costs are \$0.10/kWh. A modest initial investment in close clearance PEEK wear rings will save an additional \$40,000 over the same period in this application.

Plus, the 3393 doesn't just start efficient, it stays efficient. Standard casing rings provide an easily replaceable wear surface to restore original efficiencies.

Lower Maintenance Costs


Maintenance and inspection are simplified in the 3393 because the balance drum is accessible and removable from the discharge side of the pump. To further aid disassembly, puller holes are provided in the major components.

When you examine all the factors, it's clear that the Goulds 3393 from ITT delivers the kind of total cost of ownership savings that desalination plants and other industrial facilities need today.

Higher Reliability


Every Goulds 3393 is equipped standard with *i-ALERT*™, an onboard condition monitoring device. It provides a visual indication if vibration and temperature limits are reached. This highly reliable early-warning device can avoid a great deal of unplanned downtime and process disruption costs over the life of the pump.

In addition the 3393 has an integrated diffuser and interstage casing which eliminates the fit and machining tolerance between the two parts. A shorter bearing span provides a stiffer shaft with less sag and less chance of wear surface contact at start up. And impellers can be machined to accept impeller wear rings to improve wear resistance and increase useful impeller life. All these things contribute to a more reliable pump.

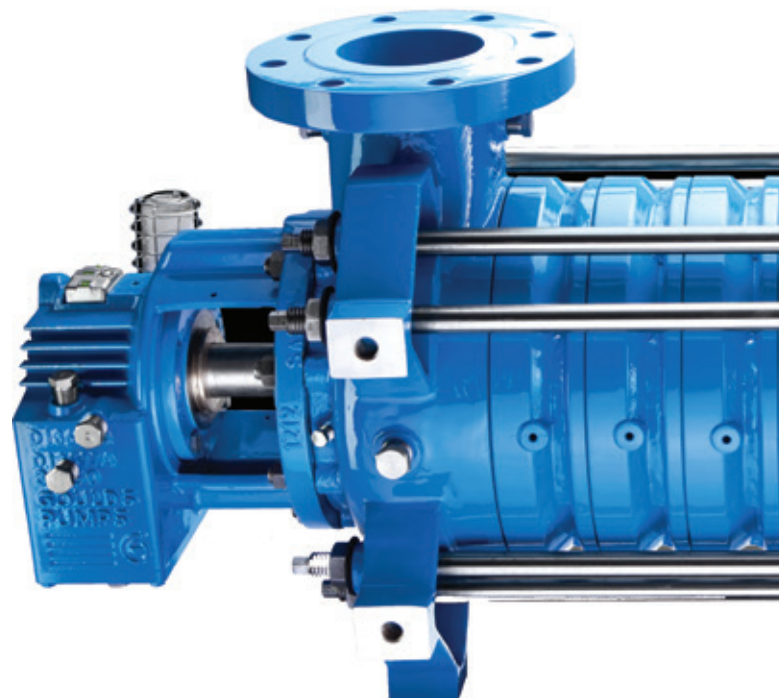


Choose ITT to always lower your total cost of ownership.

Total cost of ownership is the most comprehensive way to identify the true expenses associated with operating and maintaining pumps and related equipment. Initial price is a small fraction—on average just 10 percent—of what you'll spend to operate equipment over its lifetime.

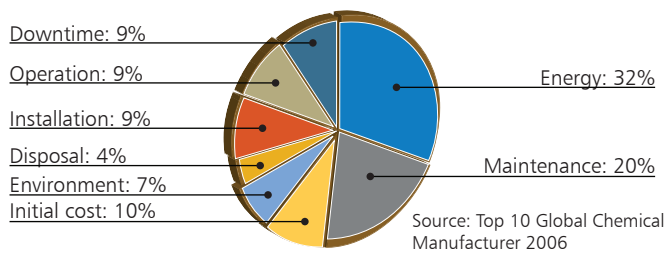

Of the remaining costs, the majority can be minimized by careful attention to all aspects of owning and operating a pump. Nobody does this better than ITT. Let's take a closer look to see how:

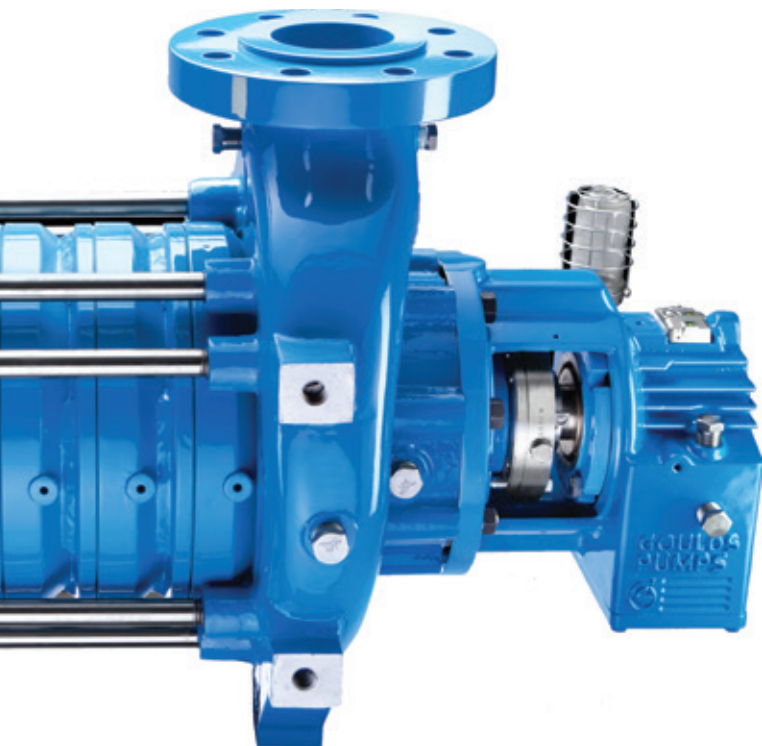

Reliability

With over 160 years of pumping experience, ITT sets the standard for increasing mean time between failures. Plus, with our worldwide sales and service reach you have access to industry experts to resolve your process needs or to evaluate and upgrade your equipment.

What's more, ITT offers innovative ways to keep you in touch with your pumps so you can keep them operating reliably. Our patented *i-ALERT™* provides a simple, early indication of change in a pump's operational signature. PumpSmart® and ProSmart® systems deliver continual feedback and control.

Maintenance

ITT is unrivaled in supplying parts globally. And, because our equipment is easier to inspect and repair than many competitors', you can get up and running quickly and minimize production losses. When repairs are necessary, our modular designs reduce inventory costs while covering a wide hydraulic window. ITT's worldwide presence puts aftermarket services where you most need them to keep your equipment running at peak performance.

Energy

ITT designs for the highest efficiency. Our wide range of models and sizes coupled with multiple hydraulic selections allows us to tailor pump performance to your process. The right pump saves energy and lowers your costs.

These factors are just the beginning. ITT has carefully thought out every aspect of Total Cost of Ownership to provide maximum value with every purchase. In addition, we offer a full suite of Plant Performance Services designed to reduce your ownership costs even more.



Specifications

General

- Radially split, segmented casing, multistage pump
- Modular interstage components
- Radial and end suction configuration
- Materials: carbon steel, 12% chrome, duplex and super duplex stainless steels
- High efficiency

Pressure and Temperature Limits

- All: 400°F
- All: 350 psig suction pressure
- Carbon steel: 1036 psig discharge pressure
- Duplex/super duplex: 1480 psig discharge pressure
- 12% chrome: 1687 psig discharge pressure

Suction and Discharge Casings

- Flanges raised face per ANSI/ISO or EN/DIN specifications
- Radial and end suction available for suction casing
- Product lubricated silicon carbide sleeve bearing for end suction pump
- Through bolting on all flanges
- Dual volute type discharge casing
- Radial suction and discharge casing nozzles positioned in 90° increments.
- Casing wear rings standard

Interstage Casings

- Rigid, heavy duty parts
- One piece combined continuous channel multivane diffuser and stage piece
- Casing wear rings standard

Impellers

- Enclosed type
- Precision investment cast
- Keyed to the shaft
- Dynamically balanced
- Two impeller designs (min) for each pump size
- Optional impeller wear rings

Shafts

- Impeller keyways staggered for better balance
- Suction end drive available for the radial suction pump

Balancing Device

- Involute balance drum for axial thrust balance
- Dual step surface for closer running clearance
- Accessible and removable from the discharge side of the pump

Instrumentation

- Bearing frames pre-machined for temperature and vibration sensors
- *i-ALERT™* standard

Seals and seal systems

- Single balanced or unbalanced mechanical seals
- Single cartridge mechanical seals
- Standard seal flush plan modified plan 11/13
- Seal chamber accepts a mechanical seal with pumping ring
- Plan 11, 23 as options

Bearing housings

- Radial suction pump bearing housings identical on suction and discharge ends
- Inpro VBXX-D™ labyrinth seals are standard
- Bearing housings are finned for additional cooling

Bearings

- End suction sleeve bearing supported in the suction casing
- Heavy duty anti-friction bearings in bearing housings
- Oil lubricated anti-friction bearings

Couplings

- Disc type spacer coupling standard

Coupling guards

- Standard
- Comply with OSHA and EN requirements

Shaft guards

- 304SS expanded metal shaft guards cover bearing housing openings

Baseplates

- Rigid fabricated steel design
- Reduced vibration
- Assured positive alignment


Drivers

- Electric motor
- Steam turbine
- Diesel engine
- Speed increasing or reducing gears


Certifications

- CE marking and ATEX certification


Hydraulic Coverage

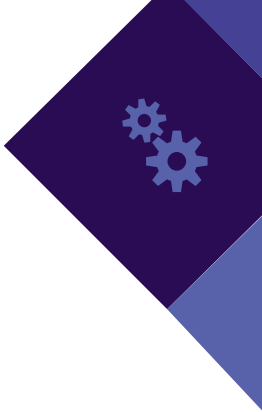

60 Hz

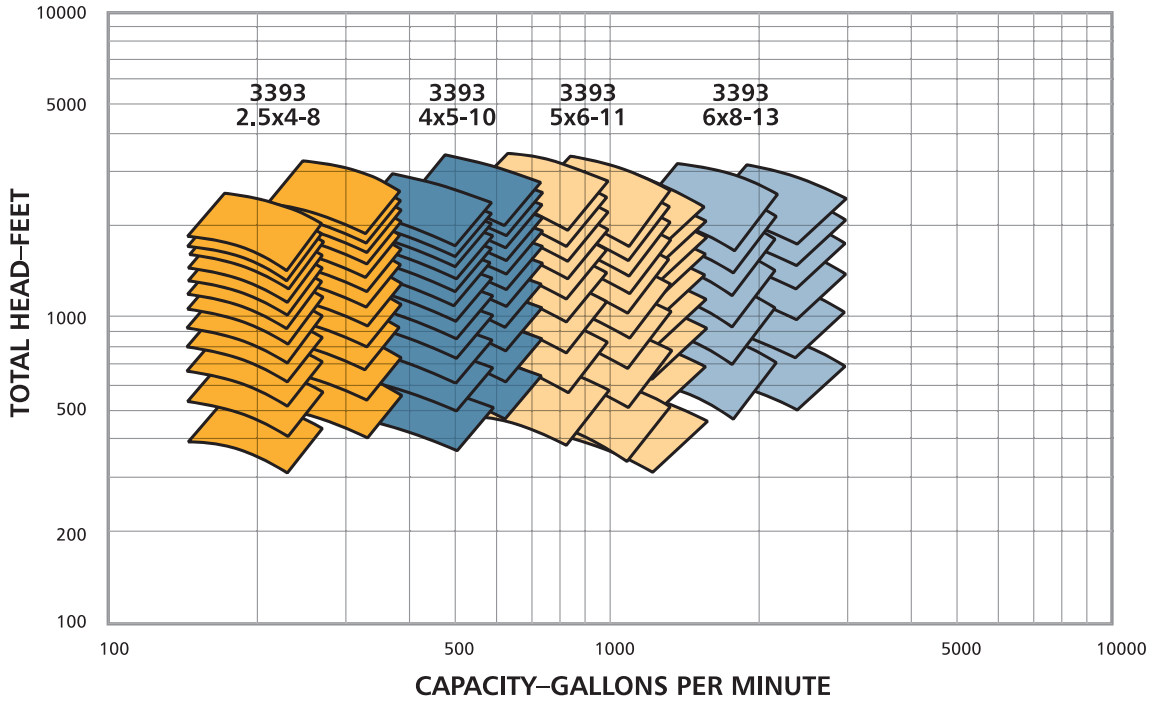

50 Hz

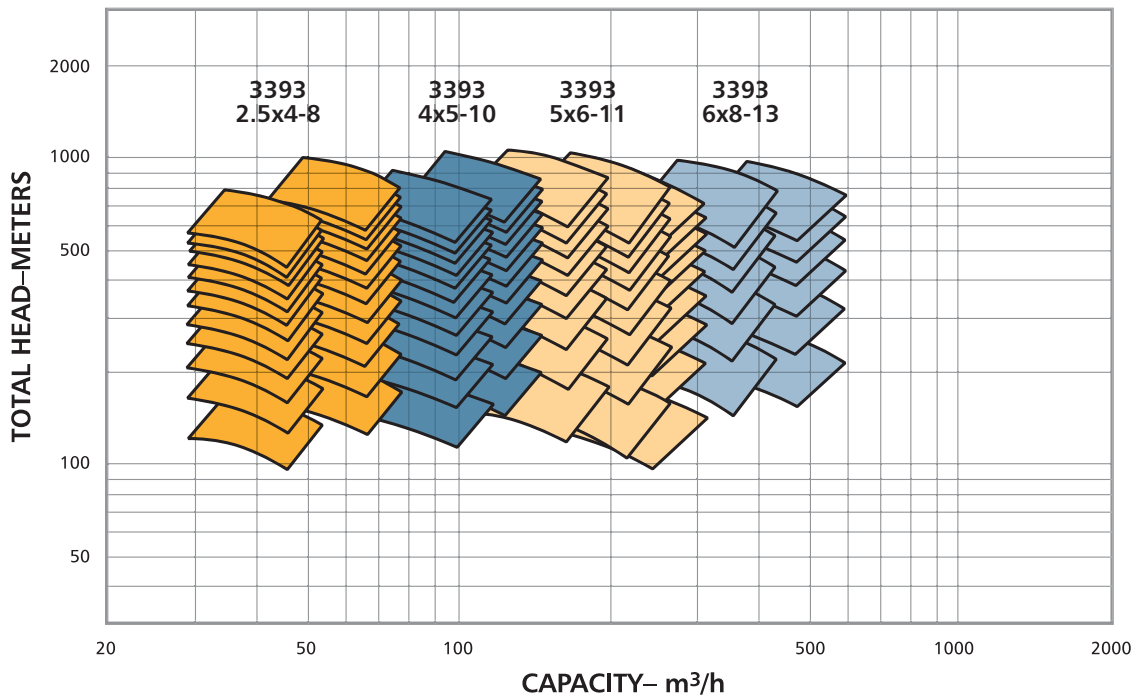




Goulds 3393

High Pressure, Multistage Ring Section Pumps



i-ALERT™ CONDITION MONITOR

- Proprietary on-board condition monitoring integrated with bearing housings is standard
- Early visual indication of operating performance facilitates proactive maintenance practices

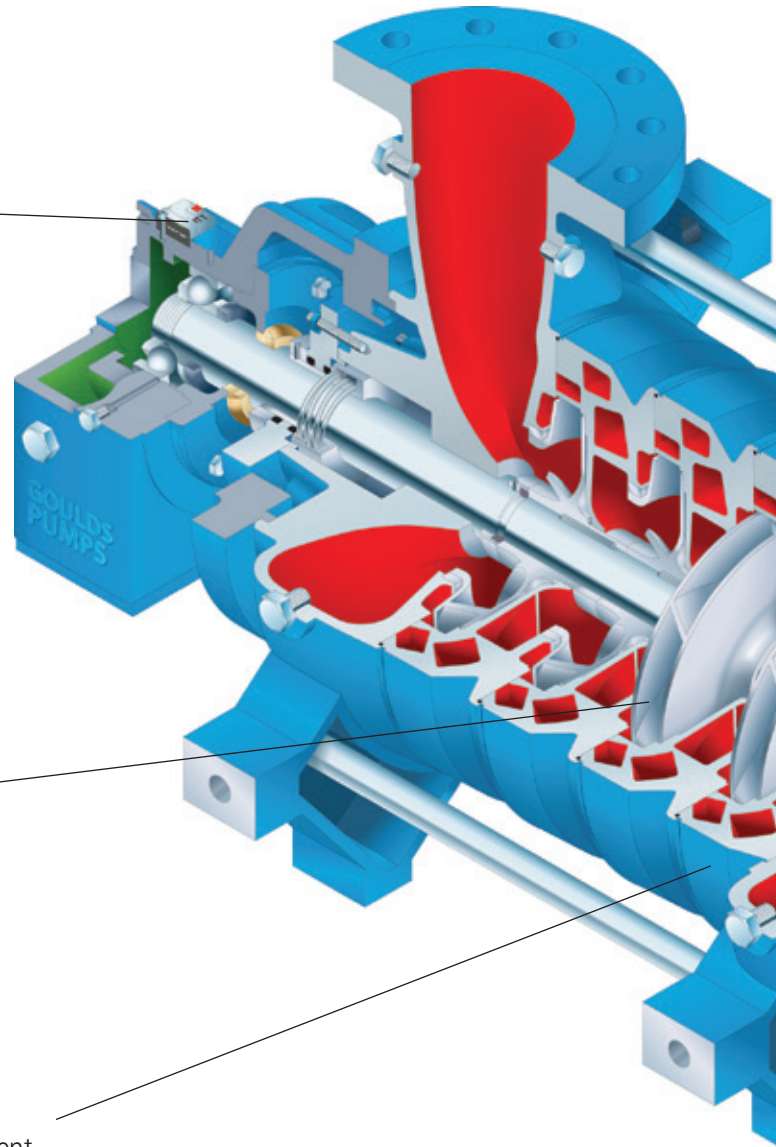


PRECISION CAST IMPELLER

- Optional impeller wear ring renews efficiencies to as-new condition
- Multiple hydraulic designs maximize efficiency for customer applications



PRECISION CAST CONTINUOUS CHANNEL DIFFUSER/STAGE CASING

- Integrated design simplifies alignment for ease of maintenance
- Smooth flow transition reduces hydraulic losses

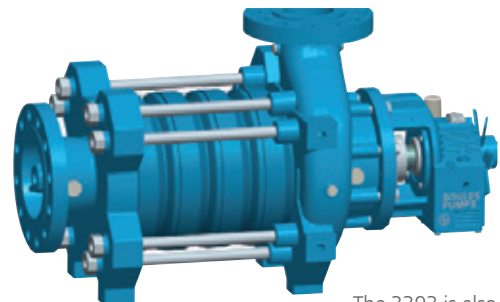

The 3393 is also available in end suction configuration.



DUAL VOLUTE TYPE DISCHARGE CASING

- Improved efficiency
- Lower Radial Loads

INVOLUTE BALANCE DRUM


- Involute configuration reduces installation footprint
- Accessibility from discharge side simplifies maintenance
- Dual step surface yields reliability under all conditions

SEAL CHAMBER

- Accepts a range of mechanical seals and piping plans

RUGGED BEARING HOUSING

- Finned for additional cooling
- Instrumentation ready
- Heavy duty anti-friction bearings

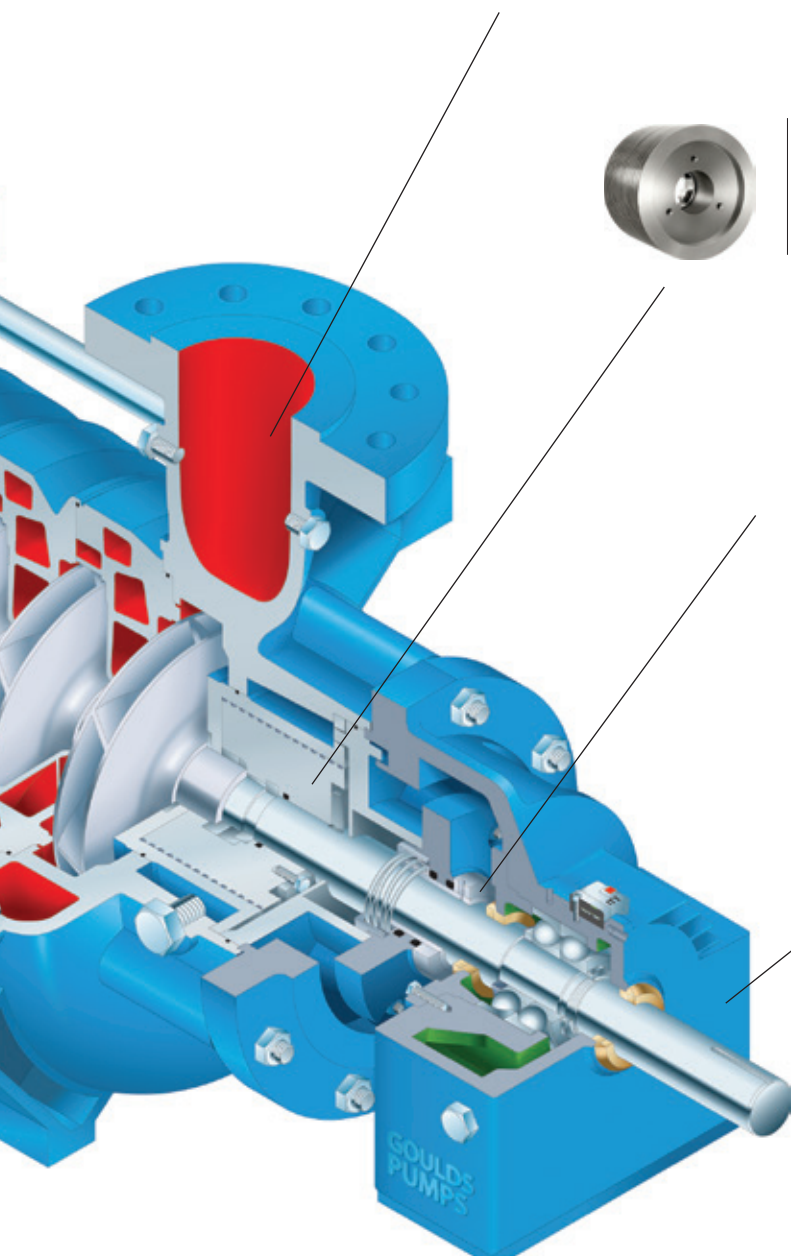

DESIGNED TO MINIMIZE YOUR TOTAL COST OF OWNERSHIP

Features:




- Designed for world class efficiency and reliability
- Precision cast components
- Modular design
- End or radial suction configurations
- Multiple hydraulics
- Multiple nozzle orientations for radial suction pump

Applications:


- Reverse osmosis
- Boiler feed
- Cogeneration
- Shower / spray service
- Pressure boosting
- High pressure cleaning
- Snow making




Sectional View

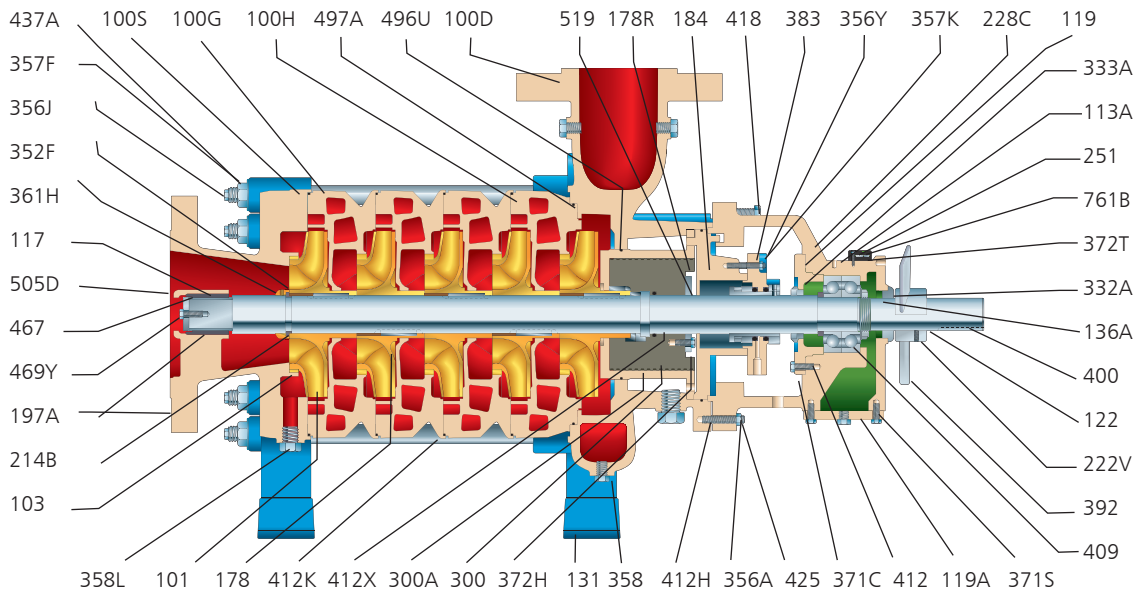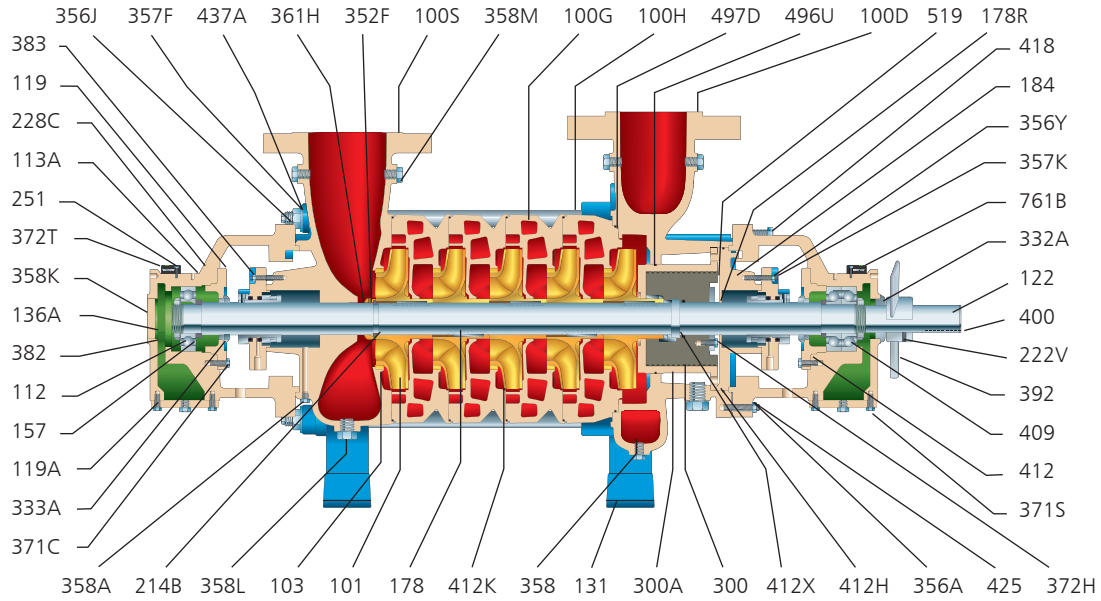

3393 Optional Tapping

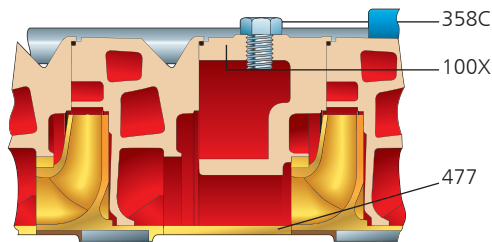

3393 Optional Interstage



3393 Optional Impeller
Wear Rings





Parts List and Materials of Construction



Item Number	Description	Materials				
		Duplex	Super Duplex	Chrome Steel	Carbon Steel chrome fitted	Carbon Steel
100B	1st Stage Remachine for Flan 11 takeoff	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
100D	Casing (Discharge)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
100G	Casing (Stage)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
100H	Casing (Final Stage)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
100S	Casing (Suction)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
100X	Casing (Destaging and Takeoff)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
101	Impeller (Series)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
103	Case Wear Ring (Standard Clearance)		PEEK		420 SS + PEEK	
112	Ball Bearing (Radial)					Steel
113A	Breather					Steel
117	Bearing Sleeve					Silicon Carbide
119	Cover (Bearing Housing)					Ductile Iron
119A	Cover (Bearing Housing Sump)					Steel
122	Shaft		Duplex SS			17-4 PH
131	Foot					Steel
136A	Bearing Nut					Steel
142	Impeller Wear Ring		Duplex SS			17-4 PH
157	Spacer Sleeve					Carbon Steel
178	Key (Impeller)		Duplex SS			17-4 PH
178R	Key (Balance Drum)		Duplex SS			17-4 PH
184	Seal Chamber	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
197A	Bearing Bushing					Silicon Carbide
214B	Split Ring		Duplex SS			17-4 PH
222V	Set Screw (Fan)					316 SS
228C	Bearing Housing					Ductile Iron
251	Oiler (Constant Level)					Aluminum/Glass
300	Balance Drum	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
300A	Balance Drum Stator	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
301	Impeller (Option - Low NPSH 1st Stage)	Duplex SS	Super Duplex SS	12 Chrome		Carbon Steel
332A	Bearing Isolator (Outboard)					Bronze/Viton
333A	Bearing Isolator (Inboard)					Bronze/Viton
352F	Set Screw (Retaining Ring)		20Cb3 SS			316 SS
356A	Stud (Bearing Housing to Suction/Discharge Casing)					Alloy Steel
356J	Tie Rod					4140 Steel
356Y	Stud (Seal Chamber)					316 SS
357F	Nut (Tie Rod)					Alloy Steel
357K	Nut (Seal Chamber)					316 SS
358	Drain Plug (Casing)		20Cb3 SS			316 SS
358A	Plug (Seal Chamber Flush)		20Cb3 SS			316 SS
358C	Plug (Casing Destaging)		20Cb3 SS			316 SS
358K	Plug (Bearing Housing Opening)					Carbon Steel
358L	Plug (Balance Return)		20Cb3 SS			316 SS
358M	Plug (Casing Branch Tapping)		20Cb3 SS			316 SS
361H	Retaining Ring		Duplex SS			17-4 PH
371C	Cap Screw (Bearing Housing Cover)					316 SS
371S	Cap Screw (Bearing Housing Sump Cover)					316 SS
372H	Cap Screw (Balance Drum Locking Plate)		20Cb3 SS			316 SS
372T	Cap Screw (i-ALERT to Bearing Housing)					316 SS
382	Lockwasher (Thrust, Radial Bearing)					Steel
383	Mechanical Seal					
392	Fan (Bearing Cooling)					Aluminum
400	Key (Coupling)					1018 Steel
409	Ball Bearing (Thrust)					Steel
412	O Ring (Bearing Housing Cover)					Buna-N
412H	O Ring (Seal Chamber)					EPDM
412K	O Ring (Stage Casing)					EPDM
412X	O Ring (Balance Drum)					EPDM
418	Cap Screw (Bearing Housing Jacking)					316 SS
424	Screw (Plate to Casing/Frame)					304 SS
425	Nut (Bearing Housing to Pump Casing)					Alloy Steel
437A	Washer (Tie Rod)					Carbon Steel
467	Retaining Plate (Bearing Bushing)		Duplex SS			17-4 PH
469Y	Cap Screw (Retaining Plate to Shaft)		20Cb3 SS			316 SS
477	Sleeve (Destaging and Takeoff)		Duplex SS			17-4 PH
496U	O Ring (Balance Drum Stator)					EPDM
497D	O Ring (Discharge Casing)					EPDM
499	Guard (Shaft Seal)					304 SS
505D	Tolerance Ring (Bearing Sleeve)					Hastelloy C
519	Locking Plate (Balance Drum)		Super Duplex SS			12 Chrome
534C	Bolt Retainer (Guard to Bearing Housing)					Steel
569F	Cap Screw (Guard to Bearing Housing)					316 SS
761B	i-ALERT™ Condition Monitor					Stainless Steel/Epoxy



Dimensions

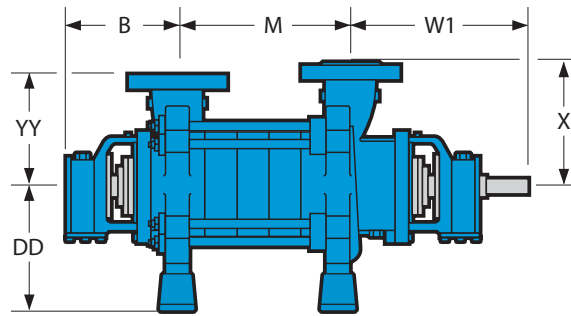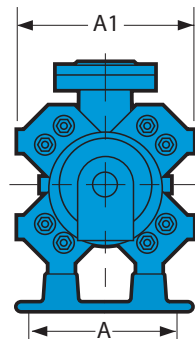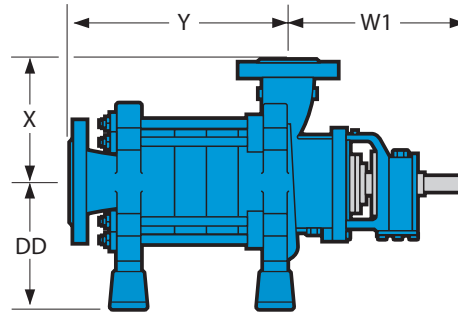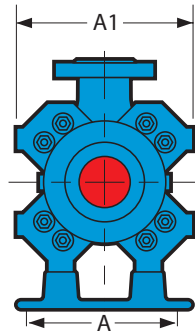


DIMENSIONS											
Size	Discharge Flange (in.)		A	A1	U	DD	X	YY	W1	B	
	ES	RS									ES / RS
2.5x4-8A, B	5 (125)	4 (125)	2.5 (65)	14.25 (362)	17.32 (440)	1.46 (37)	12.50 (318)	10.43 (265)	10.43 (265)	18.00 (457)	13.36 (339)
4x5-10A, B	6 (150)	5 (125)	4 (125)	15.50 (394)	20.08 (510)	1.65 (42)	14.25 (362)	13.58 (345)	11.81 (300)	18.54 (471)	13.78 (350)
5x6-11A, B, C	8 (200)	6 (150)	5 (125)	17.50 (445)	23.23 (590)	2.05 (52)	16.00 (406)	15.55 (395)	13.98 (355)	23.12 (587)	15.02 (382)
6x8-13A	10 (250)	8 (200)	6 (150)	19.75 (502)	28.75 (730)	2.60 (66)	18.25 (464)	17.52 (445)	17.24 (438)	25.00 (635)	16.97 (431)
6x8-13B	10 (250)	8 (200)	6 (150)	19.75 (502)	28.75 (730)	2.60 (66)	18.25 (464)	19.09 (485)	17.24 (438)	25.00 (635)	16.97 (431)

Size	Y	NUMBER OF STAGES													
		2	3	4	5	6	7	8	9	10	11	12	13	14	
2.5x4-8A	Y	9.36 (238)	11.52 (293)	13.88 (353)	16.15 (410)	18.41 (468)	20.68 (525)	22.94 (583)	25.21 (640)	27.47 (698)	29.74 (755)	32.00 (813)	34.26 (870)	36.52 (928)	
	M	5.86 (149)	8.12 (206)	10.39 (264)	12.65 (321)	14.91 (379)	17.18 (436)	19.44 (494)	21.71 (551)	23.97 (609)	26.23 (666)	28.50 (724)	30.76 (781)	33.03 (839)	
2.5x4-8B	Y	9.62 (244)	12.16 (309)	14.70 (373)	17.24 (438)	19.78 (502)	22.32 (567)	24.86 (631)	27.40 (696)	29.94 (760)	32.48 (825)	35.02 (890)	37.56 (954)	40.10 (1019)	
	M	6.12 (155)	8.66 (220)	11.20 (284)	13.74 (349)	16.28 (414)	18.82 (478)	21.36 (543)	23.90 (607)	26.43 (671)	28.97 (736)	31.51 (800)	34.05 (865)	36.59 (929)	
4x5-10A	Y	11.82 (300)	14.64 (372)	17.45 (443)	20.27 (515)	23.08 (586)	25.90 (658)	28.72 (729)	31.53 (801)	34.34 (872)	37.16 (944)	39.97 (1015)	42.79 (1087)	45.60 (1158)	
	M	7.05 (179)	9.87 (251)	12.68 (322)	15.50 (394)	18.31 (465)	21.13 (537)	23.94 (608)	26.76 (680)	29.57 (751)	32.39 (823)	35.20 (894)	38.02 (966)	40.83 (1037)	
4x5-10B	Y	11.69 (297)	14.82 (376)	17.95 (455)	21.08 (535)	24.20 (615)	27.33 (694)	30.46 (774)	33.59 (853)	36.72 (933)	39.85 (1012)	42.98 (1092)	46.11 (1171)		
	M	7.36 (187)	10.49 (266)	13.62 (346)	16.75 (425)	19.88 (505)	23.01 (584)	26.14 (664)	29.27 (743)	32.40 (823)	35.53 (902)	38.65 (982)	41.78 (1061)		
5x6-11A	Y	14.57 (370)	18.50 (470)	22.43 (570)	26.36 (670)	30.29 (769)	34.22 (869)	38.15 (969)	42.08 (1069)	46.01 (1169)					
	M	9.42 (239)	13.36 (339)	17.30 (439)	21.24 (539)	25.18 (640)	29.12 (740)	33.06 (840)	37.00 (940)	40.94 (1040)					
5x6-11B	Y	14.57 (370)	18.50 (470)	22.43 (570)	26.36 (670)	30.29 (769)	34.22 (869)	38.15 (969)	42.08 (1069)	46.01 (1169)					
	M	9.42 (239)	13.36 (339)	17.30 (439)	21.24 (539)	25.18 (640)	29.12 (740)	33.06 (840)	37.00 (940)	40.94 (1040)					
5x6-11C	Y	15.34 (390)	19.67 (500)	24.00 (610)	28.33 (720)	32.66 (830)	36.99 (940)	41.32 (1050)	45.65 (1160)	49.98 (1269)					
	M	10.20 (259)	14.53 (369)	18.86 (479)	23.19 (589)	27.52 (699)	31.85 (809)	36.18 (919)	40.51 (1029)	44.84 (1139)					
6x8-13A	Y	17.39 (442)	22.10 (561)	26.81 (681)	31.52 (801)	36.23 (920)	40.94 (1040)								
	M	11.61 (295)	16.32 (415)	21.03 (534)	25.74 (654)	30.45 (773)	35.16 (893)								
6x8-13B	Y	18.32 (465)	23.63 (600)	28.94 (735)	34.25 (870)	39.56 (1005)	44.87 (1140)								
	M	12.30 (312)	17.61 (447)	22.92 (582)	28.23 (717)	33.54 (852)	38.85 (987)								

All dimensions in inches and (mm). Not to be used for construction.

Full Portfolio of Multistage Pumps

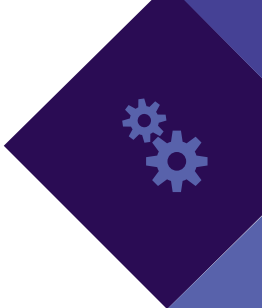

Ring Section



Model 3393
(End or radial suction)



Model 3355
(End or radial suction)


Axially Split



Model 3600




Model 3316

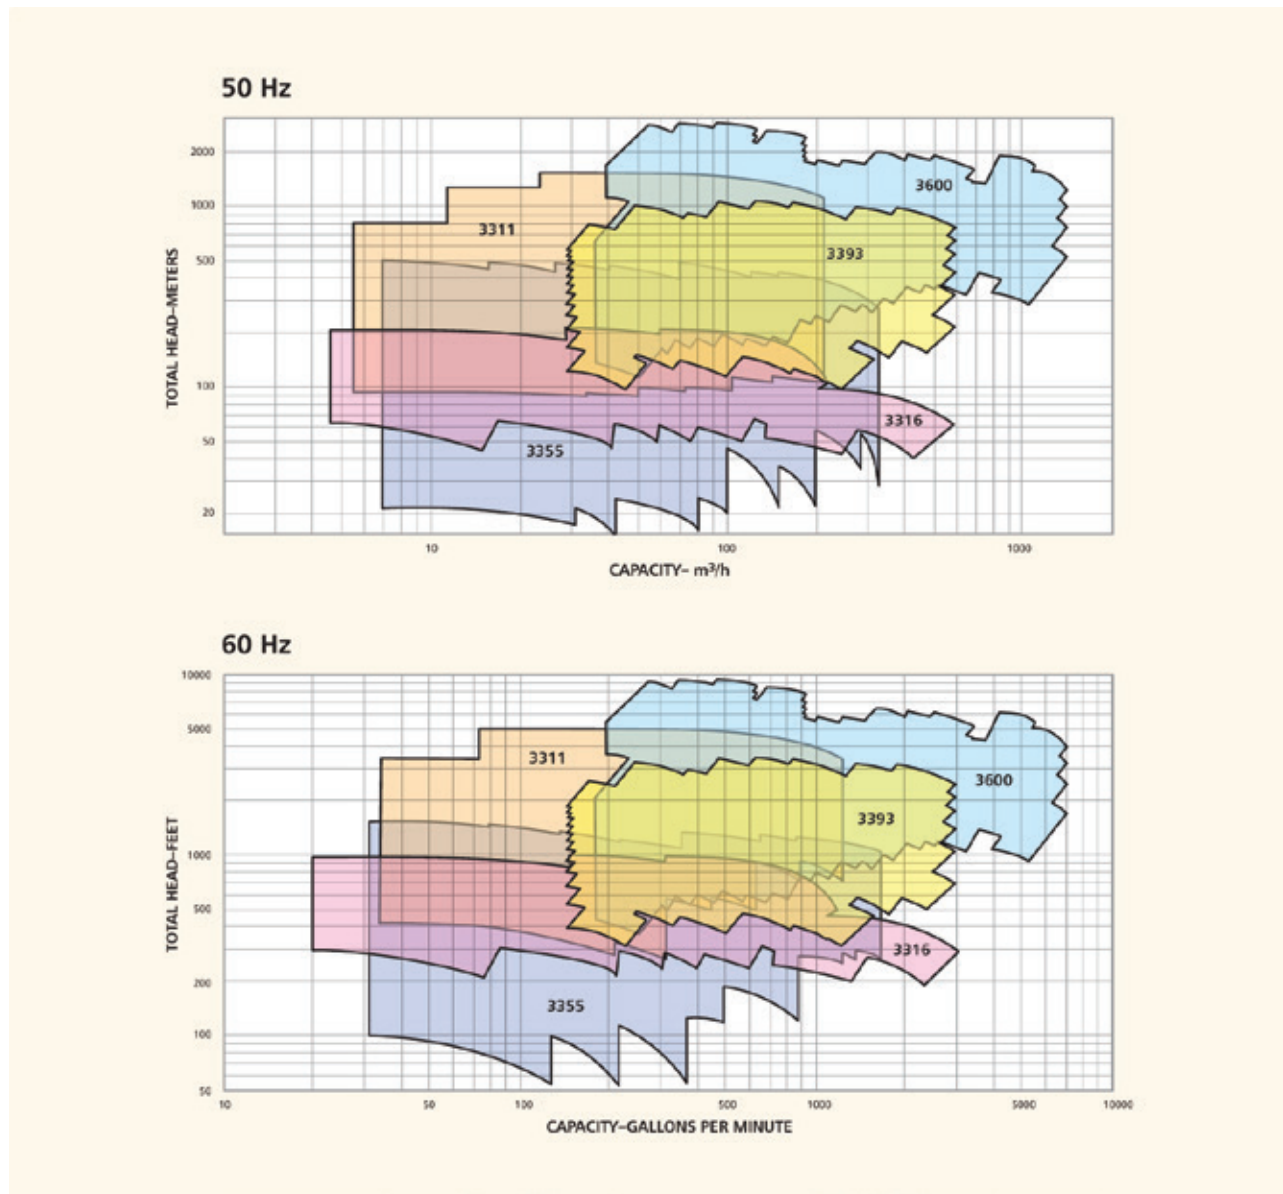

PRO services

Reliability has no quitting time.

Building on over 160 years of Goulds Pumps experience, **PRO Services** provides an array of services focused on reducing equipment total cost of ownership (TCO) and increasing plant output, including predictive monitoring, maintenance contracts, field service, engineered upgrades, inventory management, and overhauls for pumps and other rotating equipment.

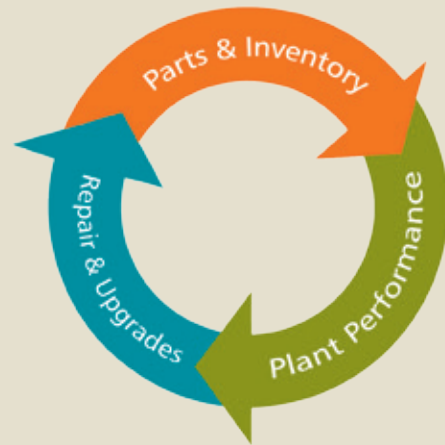

Parts & Inventory

- Efficient and timely parts supply
- Engineered parts for obsolete equipment (ProCast)
- Reverse engineering and rapid pattern manufacturing
- Inventory analysis and management
- Replacement pumps
- Goulds Pumps parts

Plant Performance

- Equipment monitoring and control products and services to improve system reliability and up-time
- Full service maintenance contracts
- ITT on-site experts identify and resolve bad actor equipment issues through:
 - Root cause failure analysis
 - Energy performance audits and improvements
 - Maintenance, operator and management training

Repair & Upgrades

- Repair to OEM standards
- Field service
- Scheduled maintenance and plant shutdowns
- Engineered drop-in replacements
- Upgrades:
 - Upgrade pumps to the latest API standard editions
 - Hydraulic re-rates to operate pumps at the customer's required setting
 - Mechanical & material upgrades



ENGINEERED FOR LIFE