

EBARA



Submersible Semi-open Vortex Sewage Pumps

Model DVU



water | wastewater | sewage | drainage



EBARA Fluid Handling

an EBARA International Corporation company

Model DVU


Features

- **Air filled, heavy duty motor, rated for 20 starts/hour**, dissipates heat easily, operates cooler with higher efficiencies; longer service life with lower operating costs
- **Built-in motor protection with autcut**, protects motor against overheating, single phasing, and no load; saves money on costly motor replacement
- **Molded cable** prevents capillary action; reduces maintenance costs
- **60,000 hour bearings**; ensures long, dependable operation and lowers maintenance costs
- **Large solids handling capabilities** prevents clogging
- **Semi-open vortex type recessed impeller**; vortex action prevents clogging and handles stringy material better vs moving pumpage through impeller vanes; provides durability, high reliability, and lowers maintenance costs
- **High quality stainless steel shaft**; provides high tensile strength, corrosion resistance, longer life, and lower maintenance costs
- **Double mechanical seals**-silicon carbide lower seals, carbon/ceramic upper - hard faced upper and lower seals operate in an oil bath; providing longer service life and lower maintenance costs
- High wire to water efficiencies reduced power consumption; reduced cost of operation
- **Available for slide rail installations** provides ease of maintenance for small sump type installations
- Three phase, FM explosion proof, Class 1, Div. 1, Group C & D available in DVFMU series 2 HP and above

Standard Specifications

| | | |
|--------------------------|--|--|
| Design | Discharge | 2, 3, 4 inch |
| | Horsepower | 1 to 5HP, Single Phase 1 to 2 HP, Three Phase |
| | Capacity | 16 to 430 GPM |
| | Total head | 9 to 66 feet |
| | Max.Liquid temp. | 104°F/40°C |
| Speed | 1800 RPM | |
| Materials | Casing | Cast Iron |
| | Impeller | Cast Iron |
| | Shaft | 403 Stainless Steel |
| | Motor Frame | Cast Iron |
| | Fastener | 304 Stainless Steel |
| Construction | Mechanical Seal | |
| | Double Mechanical Seal | |
| | Material – Upper | Carbon/Ceramic |
| | Material – Lower | Silicon Carbide/Silicon Carbide |
| | Impeller Type | Semi-open Recessed Vortex |
| | Bearing | Prelubricated Ball Bearing |
| | Motor | Air-filled, Insulation Class F |
| | Single Phase | 208/230V |
| | Three Phase | 208/230V, 460V |
| | Service Factor | 1.15 |
| Motor Protection | Built-in Auto cut - overload, no load, out of phase, single phasing protection | |
| Submersible Cable | 33 ft. standard cable length, Optional 66 ft. | |
| Accessories | Optional QDC System | |

DVU selection chart

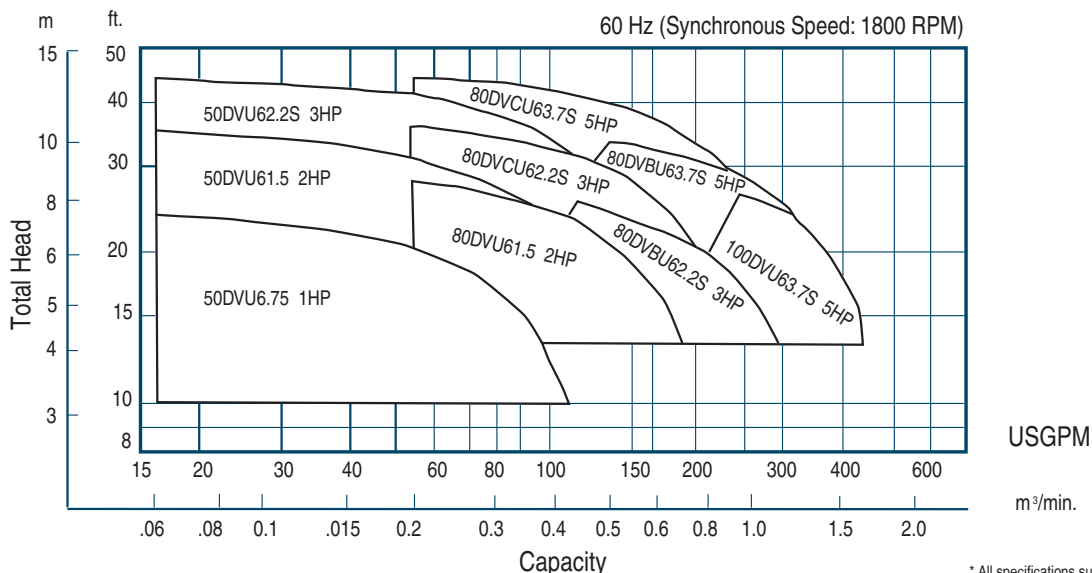

* All specifications subject to change without notice.



EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • t (803) 327 - 5005 • f (803) 327 - 5097

www.pumpsebara.com

© 2011 EBARA International Corporation, All rights reserved.

EFHDVU1011