



**THE RIGHT PUMP FOR  
TOUGH JOBS**

**KB-SERIES**


**HEAVY DUTY DEWATERING/LIGHT SLURRY  
AGITATOR SUBMERSIBLE PUMPS**



**SETTLING BASINS, RETENTION PONDS & WASH SUMPS  
OR ANY PUMP JOB WITH TOUGH SILT, SAND OR COAL FINES.**

# KB PUMPS – SUPERIOR DEWATERING

KB Series *Top Discharge* Submersible Agitator Pumps  
 “Pumps down to less than 6 inches”

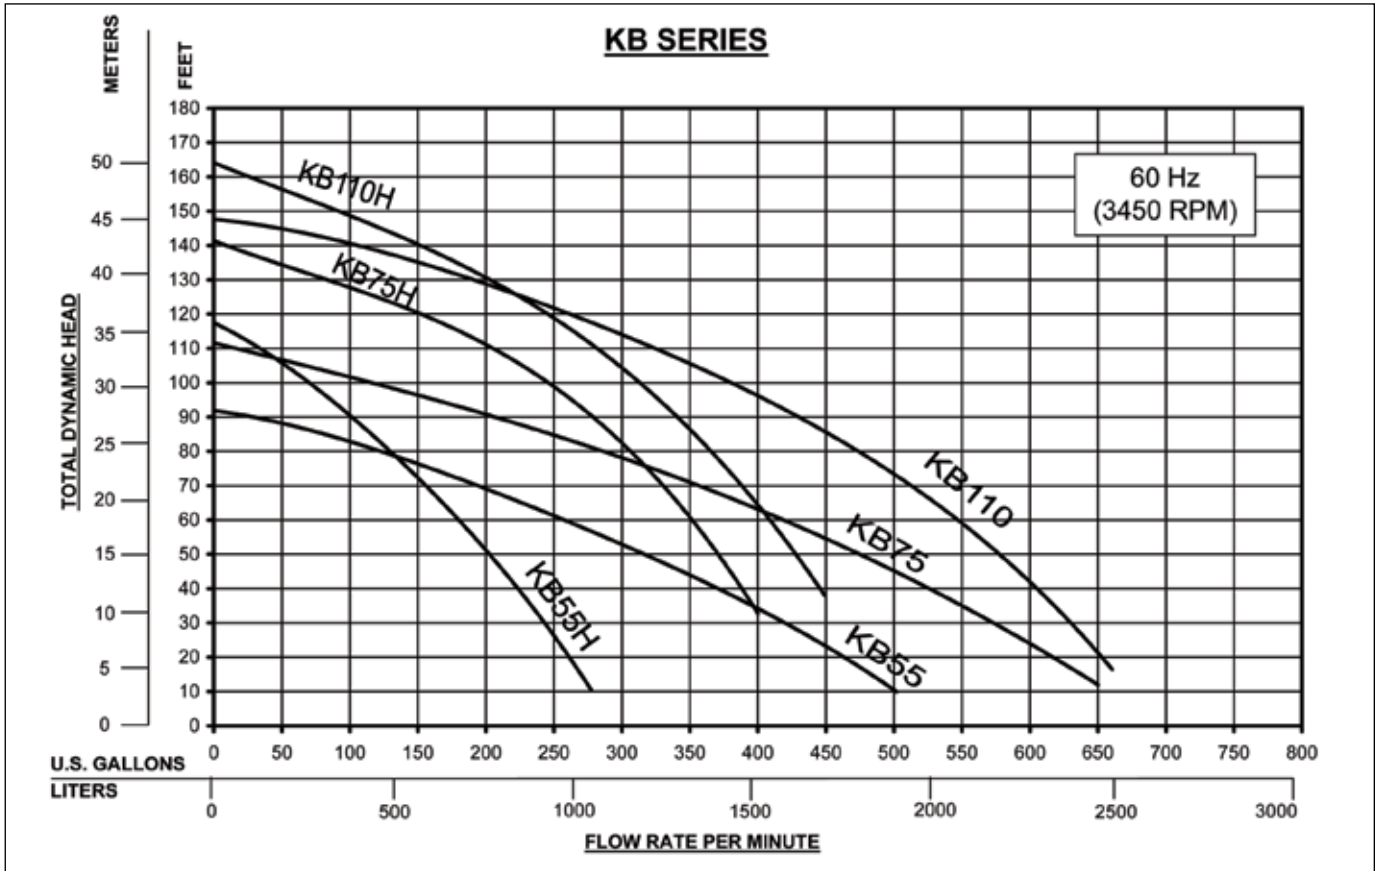

MODEL	DISCH. SIZE	H.P.	VOLT	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS	HEIGHT	WIDTH
KB55	4"	7.5	230/460	20.4/9.9	0.39"	91'	500	335	29.5"	13.8"
KB55H	3"	7.5	230/460	20.4/9.9	0.39"	117'	277	335	28.3"	13.8"
KB75	6"	10	230/460	27.3/13.6	0.39"	111'	650	357	32.5"	14.6"
KB75H	4"	10	230/460	27.3/13.6	0.39"	141'	400	357	31.3"	14.6"
KB110	6"	15	230/460	36.7/18.3	0.39"	147'	660	427	33.7"	14.6"
KB110H	4"	15	230/460	36.7/18.3	0.39"	164'	449	427	32.5"	14.6"

## CONSTRUCTION

Abrasive resistant Hi Chrome Impeller, Wear Plate and Agitator.  
 Double Mechanical Seal: Lower seal is SiC/SiC and upper seal is Carbon/Ceramic.

## MOTOR

Insulation: Class H  
 Voltages: Available in 230/460 and 575  
 Built-In thermal and amp overload protection  
 Three phase, 3450 RPM with 50' power cord

SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

 <p>123 Spencer Plain Road                  P.O. Box 1138                  Old Saybrook, CT 06475                  Tel: (860)-399-5937                  Toll Free: (877)-BJM-PUMP                  Fax: (860)-399-7784                  Web: www.bjmpumps.com</p>	Distributor:
--	--------------