



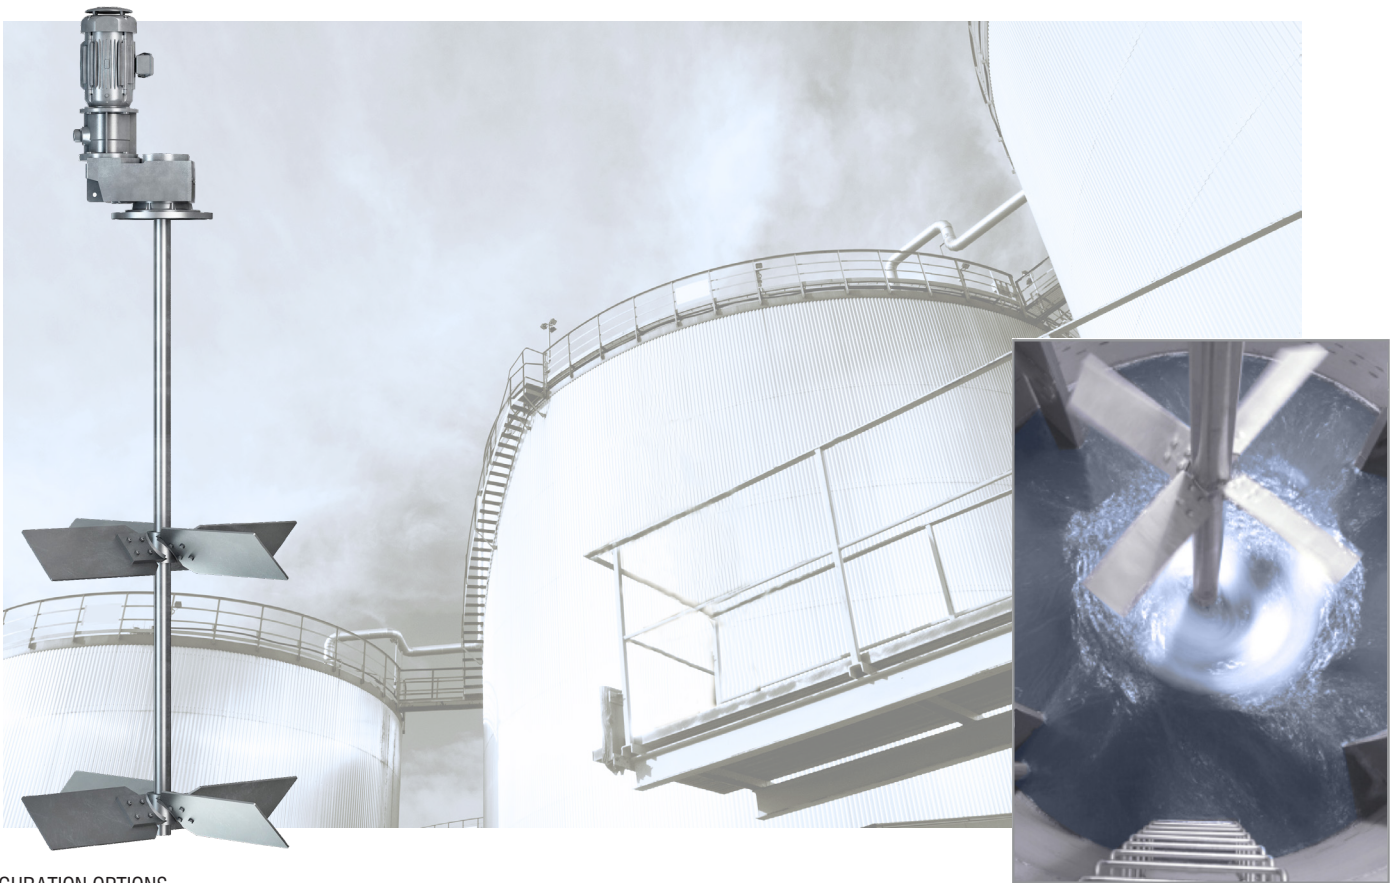

# INDUSTRIAL TANK MIXERS

## NMX SERIES

At Dynamix, we provide you with a **solution**, not just a mixer.

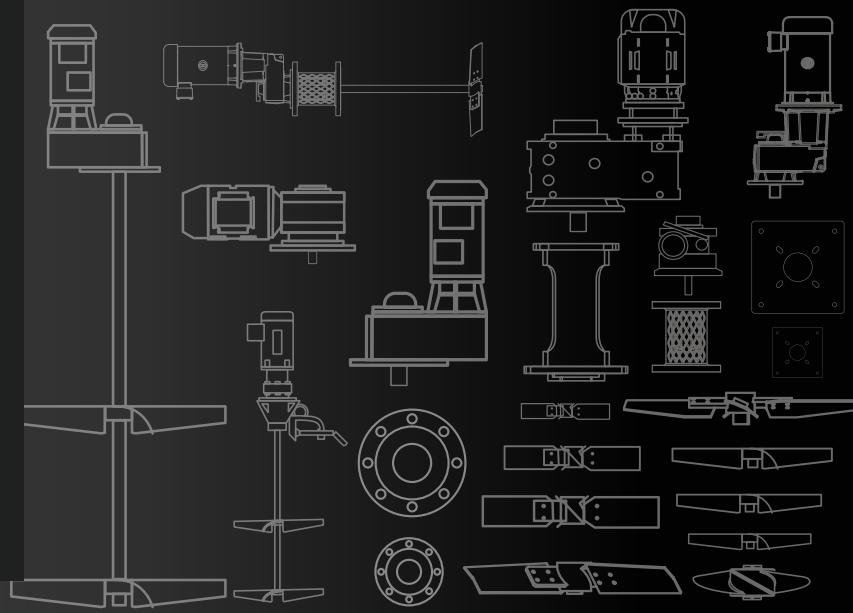

### CONFIGURATION OPTIONS

MOTOR	HP Range: 1 to 300	» A full range of motors are available for this series
GEAR REDUCTION	Minimum Service Factor - 2	» Oversized tapered roller bearing for the heaviest loads
MOUNTING	Plate / Flange	» Several heavy-duty configurations to suit your tank
IMPELLER	Pitch, Straight & High Efficiency	» A full range of impellers to be selected for perfect mixing

### THE DYNAMIX SOLUTION ASSURANCE

WE PROVIDE PERFORMANCE-GUARANTEED SOLUTIONS DESIGNED FOR YOUR PRODUCT, PROCESS, AND ENVIRONMENT.




# NMX Series Industrial Agitators

DYNAMIX "NMX SERIES" AGITATOR is specifically designed to provide the process results you demand. The quality of the components and rugged construction produce long-term, trouble free operation.



## CONFIGURATION OPTIONS

MOTOR	Power Range: 1 to 300 HP	» Standard NEMA C-face motors
GEAR	<p>Minimum Service Factor of 2.0</p> <ul style="list-style-type: none"> <li>Gears constructed of SAE 8620 steel, hardened to 60 Rockwell</li> <li>Gears ground to AGMA 13 quality will provide long and quiet operation</li> <li>Optimal configurations for low RPM mixing and high torque requirements</li> </ul>	» Ensures continuous operation under heavy loads
BEARINGS	Rated L-10 Life over 100,000 hrs	» Several heavy-duty configurations to suit your tank
OIL SEALS	<p>Quadrilip Seals</p> <p>Unique Dry Well Seal</p>	» Protects assembly even in the harshest conditions
HOUSING	SAE 30 Gray Iron	» Strong and rigid
MOUNTING	Plate / Flange (Pedestal)	» Full range of configurations available
SHAFT MOUNTING	Hollow Quill, Flange	» Options ensure ease of assembly in field
IMPELLERS	Wide Range Available	» Pitched Blade, Radial Blade, and Dynaflo™ airfoil designs
HUBS	Split Hubs are standard	» Split Hubs, Solid Hubs, Bolted Blades, and Welded Blades available
MATERIALS	Available in all machineable metal	» Carbon, 304 and 316 Steel, with various coatings available

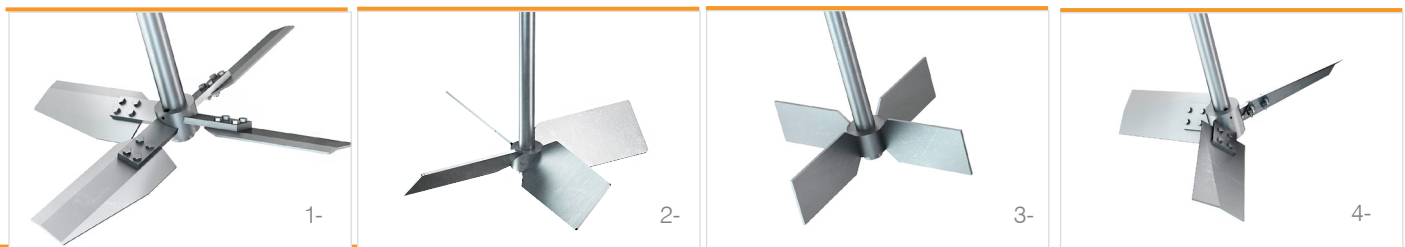

IMPELLERS: 1-Dynaflo™ 2-Pitch 3-Radial 4- P3B

## HOW TO GET STARTED

Contact our sales team directly at 1-866-563-2448 to request a quote and find out how we can optimize the quality of your application results.

TEL: 1-866-563-2448

EMAIL: [info@dynamixinc.com](mailto:info@dynamixinc.com)

DYNAMIX AGITATORS

[www.dynamixinc.com](http://www.dynamixinc.com)

