



THE RIGHT PUMP FOR
TOUGH JOBS

R SERIES

THE BULLET™ PUMPS

SLIM-LINE DEWATERING PUMPS



TOP DISCHARGE AND PERFORMANCE

THE BULLET™ PUMPS are ideal for dewatering construction sites, mines, circulating fountain water, or for all around use in industrial plants and utilities.

COST, QUALITY AND PERFORMANCE

With the lightweight and compact design of **THE BULLET™** PUMPS you will get top performance and excellent quality for a very modest investment.

Top Discharge – Allows for superior cooling of motor and provides a slim line design.

Longer Power Cord – Standard 33 ft. power cord on pumps 1/2 HP and below and 50 ft. on pumps 1 HP and above.

304SS Motor Housing – Superior abrasion resistance will not wear out like aluminum motor housings when pumping sandy water.



Three Seal Motor Protection – Motor is protected by double mechanical seals. Lower seal made of silicon carbide/silicon carbide and upper seal is made of carbon/ceramic. An additional lip seal has been installed above the impeller, to help prevent abrasives such as dirt, silt or sand, from entering into the seal chamber.

More Motor Protection – Winding protection and (NEMA) Class F motor insulation allows motor temperature to raise to 230°F. Note: R250 has Class B insulation

Automatic switch turns pump motor off if temperature and/or amp draw raises too high. When the motor cools the switch will automatically reset and the pump will turn back on.

Tough Pump Construction – Hardened cast iron stands up to rough handling and pumping sandy water unlike pumps with soft resin impellers or plastic exterior components.

R400D Special Feature – **THE MOP-UP PUMP** will pump down to 1/12th of an inch. It features a special diaphragm valve that prevents water backflow.

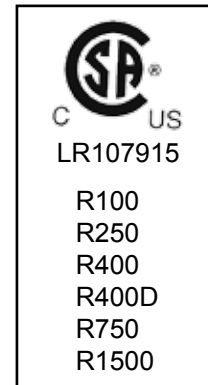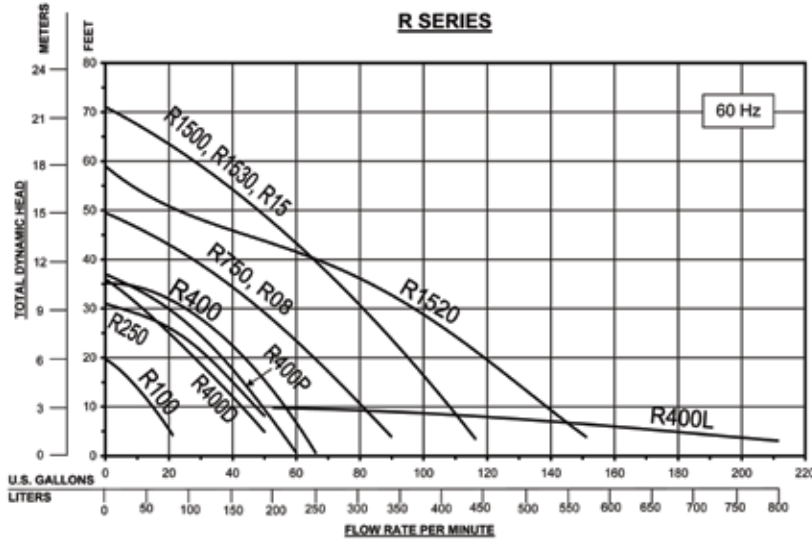

MODEL	DISCH. SIZE	H.P.	VOLT	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
R100	1.25"	0.15	115	2	1/8"	19'	21	13	9"	5.5"	33'
R250	1.5"	0.33	115	4	1/8"	31'	50	32	14.6"	7"	33'
R400	2"	0.5	115	6	1/8"	35'	66	33	14.6"	7.1"	33'
R400D	2"	0.5	115	6	N/A	36'	50	33	14.6"	7.1"	33'
R400L	4"	0.5	115/230	5.5/2.7	N/A	9.8'	211	73	19.8"	9.4"	33'
R750	2"	1	115/230	14/7	1/4"	49'	89	68	19.3"	7.3"	50'
R1500	2"	2	230	14	1/4"	71'	116	80	20.5"	7.3"	50'
R1520	3"	2	230	14	1/4"	59'	151	85	22.6"	7.3"	50'
R1530	3"	2	230	14	1/4"	71'	116	85	22.6"	7.3"	50'
R08	2"	1	230/460	3/1.5	1/4"	49'	89	66	19.3"	7.3"	50'
R15	2"	2	230/460	6/3	1/4"	71'	116	68	19.3"	7.3"	50'

SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

 <p>123 Spencer Plain Road P.O. Box 1138 Old Saybrook, CT 06475</p> <p>Tel: (860)-399-5937 Toll Free: (877)-BJM-PUMP Fax: (860)-399-7784</p> <p>Web: www.bjmpumps.com</p>	<p>Distributor:</p>
--	---------------------