



THE RIGHT PUMP FOR
TOUGH JOBS


**SINGLE PHASE
F SERIES**

FAHRENHEIT™ PUMPS
SUBMERSIBLE PUMPS FOR **HOT LIQUIDS**
UP TO **200 DEGREES FAHRENHEIT**




A SINGLE PHASE SOLUTION - ENGINEERED FOR PUMPING
CORROSIVE AND / OR SOLIDS-CONTAINING LIQUIDS OR
CLEAR LIQUIDS THAT ARE UP TO **200 DEGREES FAHRENHEIT**

JF & JXF SERIES - STANDARD & HIGH HEAD SUMP PUMPS

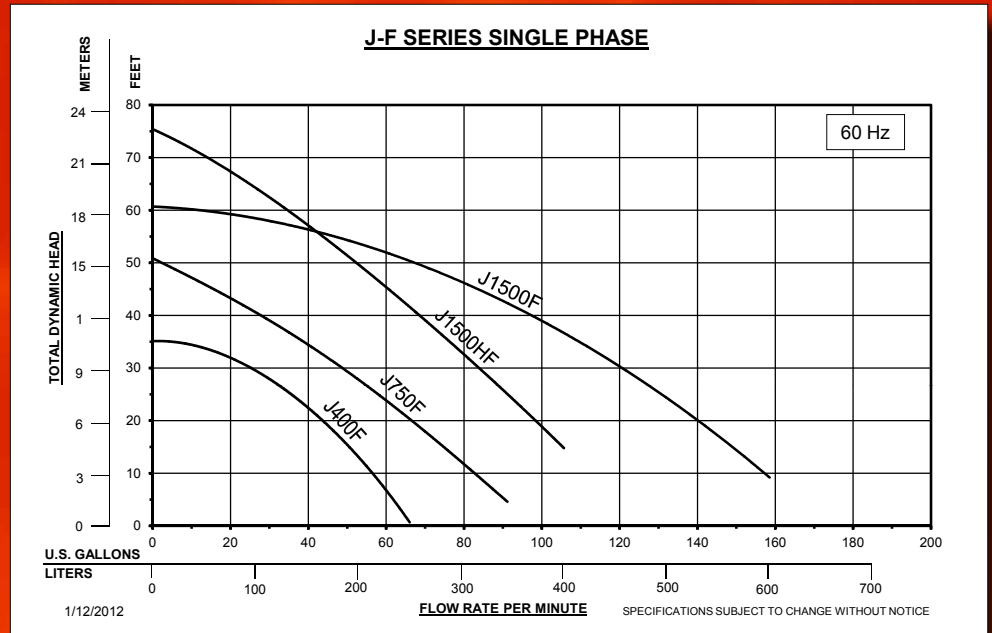

J-F & JH-F SERIES: CAST IRON


MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	EST. SHIP-WEIGHT LBS.	PUMP WEIGHT LBS.	HEIGHT	WIDTH	CABLE
J400F	2"	0.5	115/230	1	7 / 3.5	1/8"	35'	66	45	32	15.7"	8.5"	50'
J750F	2"	1	115/230	1	14 / 7	3/16"	51'	91	70	55	17.3"	11.2"	50'
J1500F	2"	2	230	1	14	3/16"	60'	158	90	68	18.7"	12.5"	50'
J1500HF	2"	2	230	1	14	3/16"	75'	105	90	68	18.7"	12.5"	50'

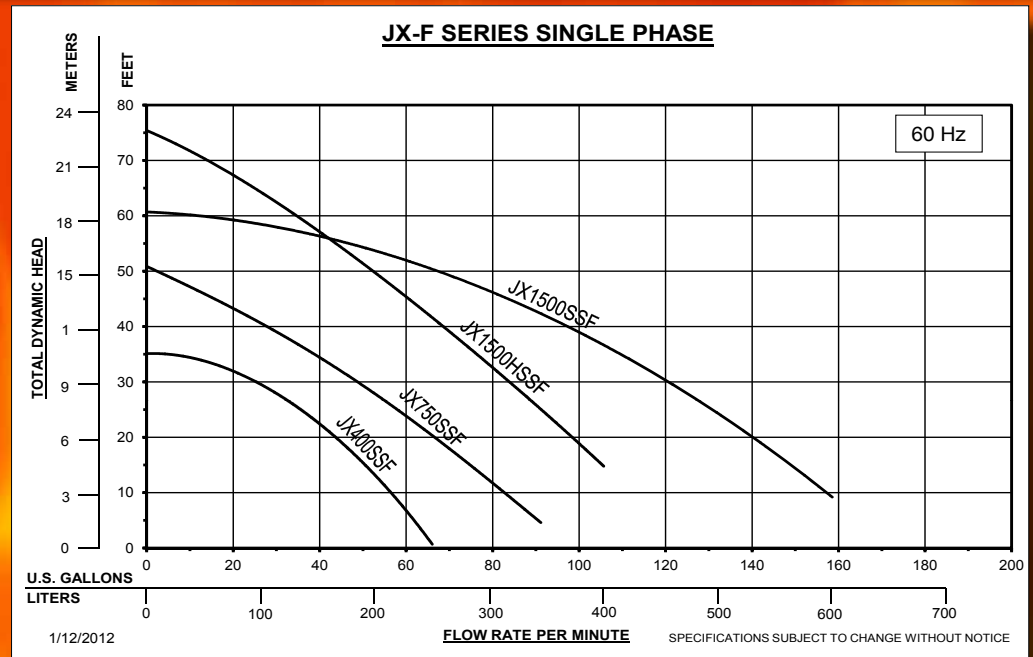

JX-F & JXH-F SERIES: 316SS


MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	EST. SHIP-WEIGHT LBS.	PUMP WEIGHT LBS.	HEIGHT	WIDTH	CABLE
JX400SSF	2"	0.5	115/230	1	7 / 3.5	1/8"	35'	66	45	32	15.7"	8.5"	50'
JX750SSF	2"	1	115/230	1	14 / 7	3/16"	50'	91	70	55	17.3"	11.2"	50'
JX1500SSF	2"	2	230	1	14	3/16"	60'	158	90	68	18.7"	12.5"	50'
JX1500HSSF	2"	2	230	1	14	3/16"	75'	105	90	68	18.7"	12.5"	50'

SKF / SXF / SKXF SERIES - NON-CLOG & SOLIDS HANDLING PUMPS

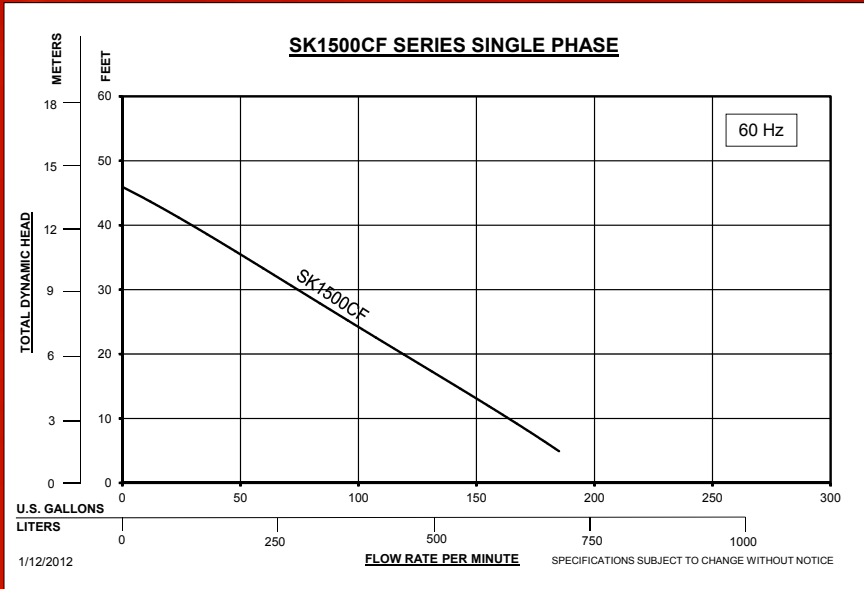

SK-F SERIES: CAST IRON


MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	EST. SHIP-WEIGHT LBS.	PUMP WEIGHT LBS.	HEIGHT	WIDTH	CABLE
SK1500CF	3"	2	230	1	14	2.5"	46'	185	110	90	21.5"	13.5"	50'

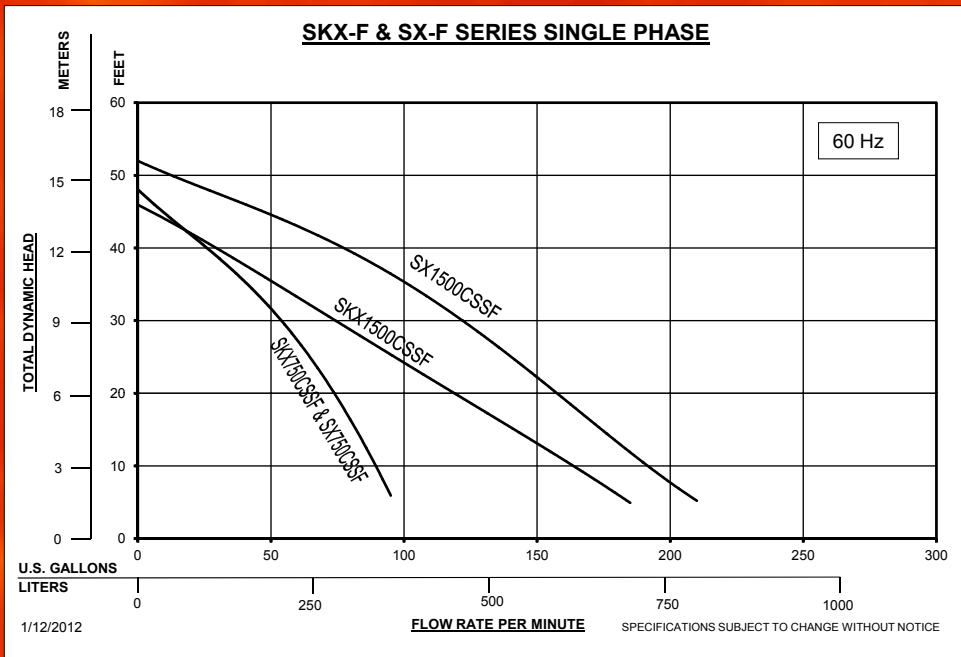

SX-F & SKX-F SERIES: 316 STAINLESS STEEL

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	EST. SHIP-WEIGHT LBS.	PUMP WEIGHT LBS.	HEIGHT	WIDTH	CABLE
SX750CSSF	2"	1	115/230	1	14 / 7	2"	38'	111	85	66	22.25"	13.5"	50'
SX1500CSSF	3"	2	230	1	14	2"	52'	210	110	90	21.25"	14.75"	50'
SKX750CSSF	2"	1	115/230	1	14 / 7	2.5"	38'	111	85	66	22.25"	13.5"	50'
SKX1500CSSF	3"	2	230	1	14	2.5"	46'	185	110	90	21.25"	14.75"	50'

SVF SERIES - SOLIDS HANDLING VORTEX PUMPS

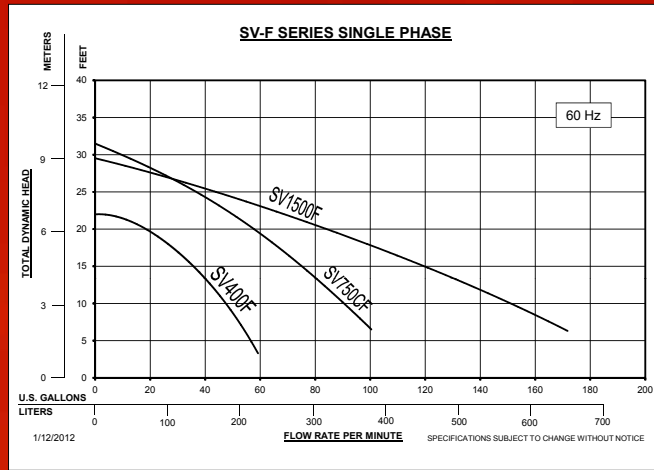

SV-F SERIES: CAST IRON

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	EST. SHIP-WEIGHT LBS.	PUMP WEIGHT LBS.	HEIGHT	WIDTH	CABLE
SV400F	2"	0.5	115/230	1	7.5 / 3.8	1.5"	22'	59	50	34	18.4"	8.5"	50'
SV750CF	3"	1	115/230	1	14/7	2"	32'	100	90	68	20.8"	13.8"	50'
SV1500CF	3"	2	230	1	14	2.5"	29'	171	110	92	23.6"	15.3"	50'

SOLUTION MATRIX		Corrosive?		
		No	Yes	
Solids?	Yes	Construction	Cast Iron	316SS
	No	Effluent	JF, JHF	JXF, JXHF

All single phase **FAHRENHEIT™** pumps are supplied with NEMA 4X control box - including start components.


Control Box Standard Features:

- NEMA 4X Enclosure with hinged door and lockable hasp
- Terminal blocks and ground lugs as required
- Seal fail indicator light
- Seal Minder® relay
- IEC rated motor connector with thermal overload
- On / Off toggle switch
- Back panel and inner door
- Incoming power block
- Control and alarm circuit fuses
- Pump start components
- Piezo audible alarm
- Motor Thermal Sensor connection
- U.L. 508 listed



SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

 <p>123 Spencer Plain Road P.O. Box 1138 Old Saybrook, CT 06475 Tel: (860)-399-5937 Toll Free: (877)-BJM-PUMP Fax: (860)-399-7784 Web: www.bjmpumps.com</p>	Distributor:
--	--------------