


- Fully submersible
- Light and compact
- Low noise levels
- Long service life
- Easy maintenance
- Low cost ownership

- Convenient carrying handle
- Dry running capability
- Sealed for life construction
- Safe in hazardous areas
- Integral baseplate/strainer
- Open Impeller for slurry and solids



SUBMERSIBLE DE-WATERING PUMP

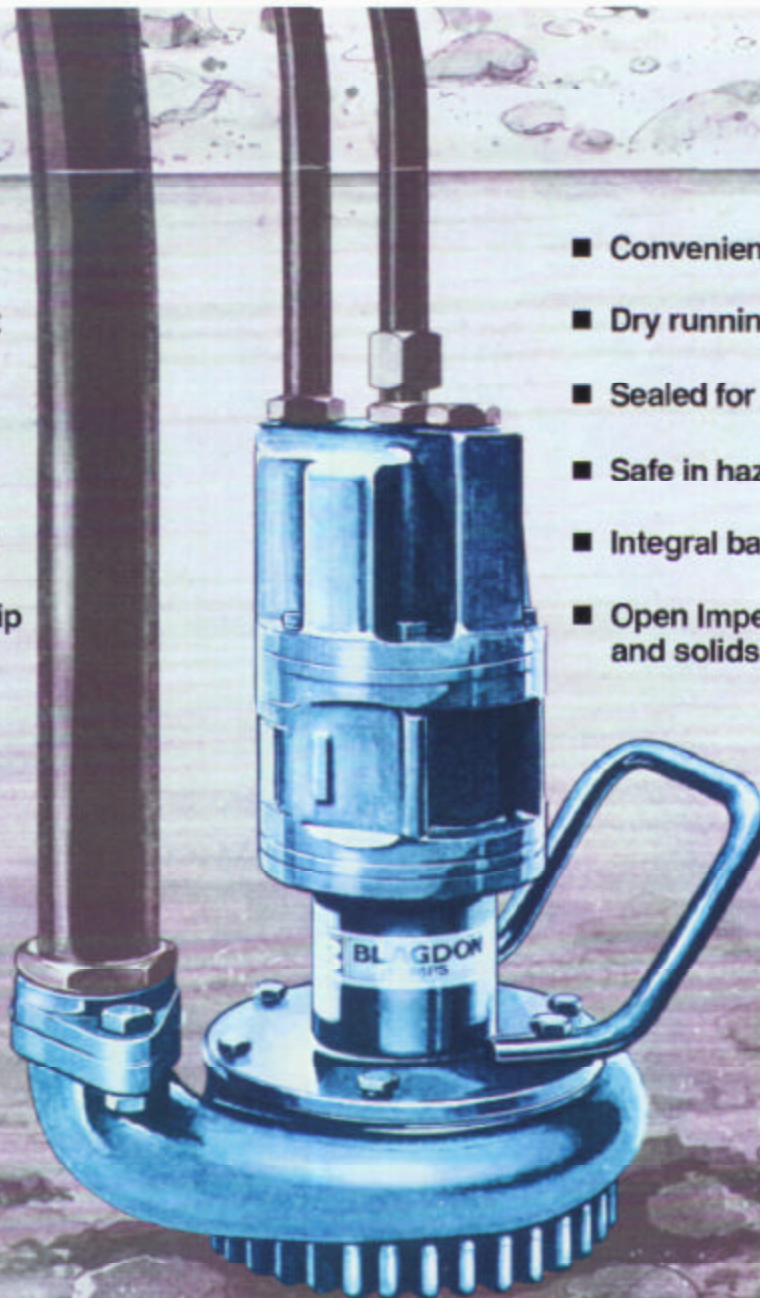

BLAGDON
PUMP™

A Unit of IDEX Corporation
P.O. Box 1568, 800 N. Main St.
Mansfield OH 44901-1568 USA
www.blagdonpump.com

NAP50/2 AIR DRIVEN SUBMERSIBLE DE-WATERING PUMP



SPECIFICATIONS

Cast Iron materials of construction

Maximum Delivery: 34 m³/hr. (125 GPM)

Max. Working Pressure: 8.6 bar (125 psi)

Max. Solid Particle Size: 6 mm

Air Inlet: 3/4" BSP (M)

Exhaust Outlet: 1" BSP (F)


Fluid Outlet: 2" BSP

Automatic over-speed control

Integral oil reservoir - automatic lubrication

Efficient air motor with auto-start

PERFORMANCE CURVE

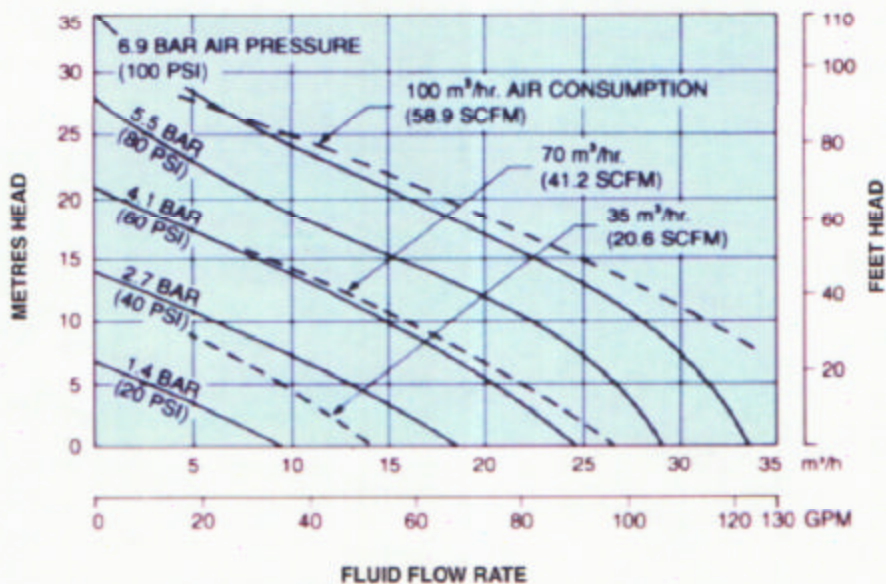

Shipping Dimensions:
19.5 x 15 x 10.5 inches

Weight: 71 lbs

Shipping Weight (Boxed): 71.75

